




CM High-Bright

Light up your window space
with the CM High-Bright

Capture passing foot traffic with the CM High Bright commercial display, designed specifically for sunlit locations such as store-fronts and street-facing windows.

Available in a range of sizes 49" | 55"



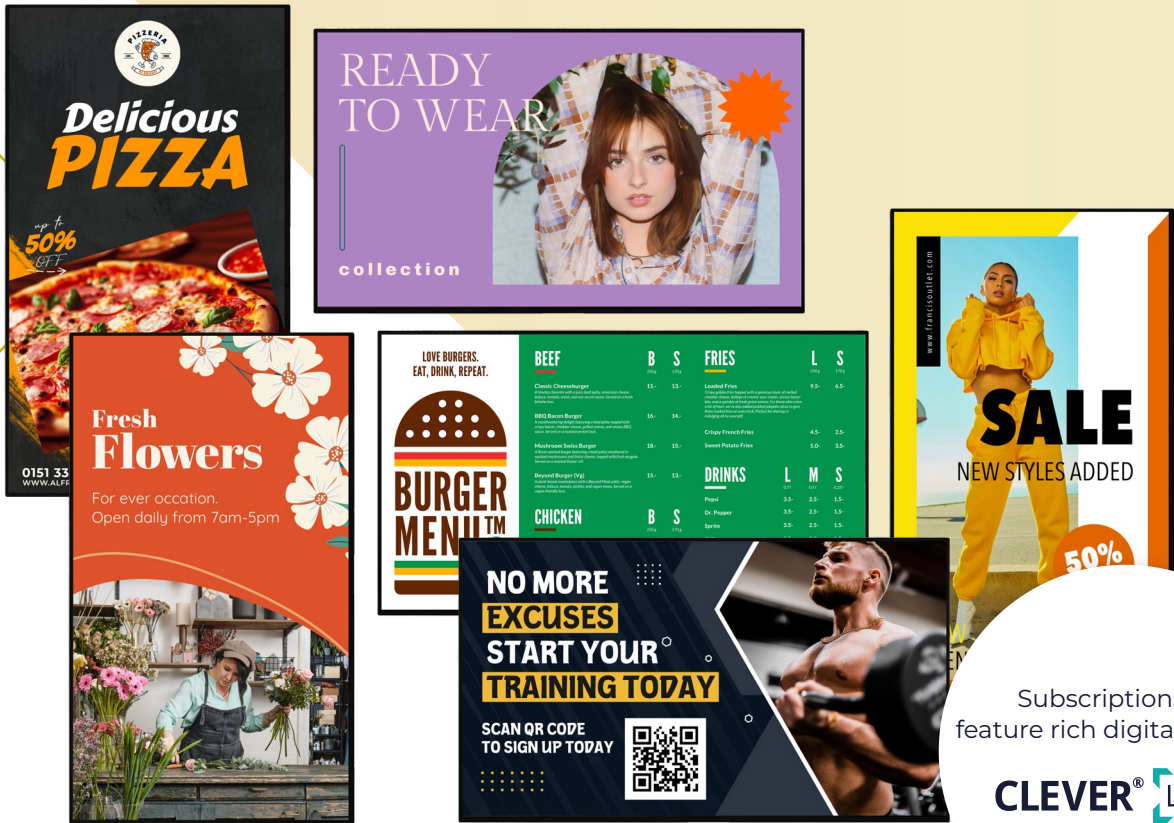

Subscription free
feature rich digital signage.

CLEVER® LIVE

The CM High Bright has CleverLive digital signage in-built for displaying full-screen posters and videos to engage and wow your audience.

With playout options of 24/7 or set-time power scheduling, the CM High Bright delivers on flexibility for any customer facing application.

Key Features

CLEVER® LIVE

Subscription free feature rich digital signage. Create your account today at cleverlive.com

Operational 24/7

With CM High Bright your message never sleeps. Captivate your audience day and night with the power of round-the-clock digital signage.



Features



High Brightness
3000 nits



Full screen posters
and/or video



Power Scheduling
– economical and
environmental
advantage



Built-in Temperature
Control Module



Landscape & portrait



24/7 Operational
capabilities



Audience
engagement with QR
codes



One Touch
Messaging &
Broadcasting



Clever Brightness
Control



Multiple mounting
options available,
please ask for more
information

CLEVER[®] LIVE

CleverLive Digital
Signage

178°

Viewing Angle

Upgrade your solution



Add a PICO XI or ProTect Media Player for multizoned digital signage.



CM High-Bright Specifications

Panel

Screen size	49" 55"
Active Area	49" 1073.78x604.00 55" 1209.6x680.4
Aspect Ratio	16:9
Native Resolution	1,920 x 1,080 (FHD, RGB)
Brightness	3000 cd/m2 (Typ.)
Contrast Ratio	4000:1
Viewing Angle	178°
Response Time	49" 8ms 55" 9.5ms
Surface Treatment (Haze, Quarter Wave Plate)	49" 3% 2H 55" 4% 3H
Orientation	Landscape and Portrait
Panel Type	a-Si TFT
Panel Lifetime (Minimum)	50,000Hr
Operation Hours	24/7
Area of Usage	Sunlit Locations / High Bright Areas

Operating System

Android System	Android 11
Android CPU	RK3288

Connectivity

HDMI In	x1
HDMI Out	x1
USB In	x1
DIV In	x1
RS232 In	x1
RS232 Out	x2
VGA In	x1
Wi-Fi	x1
RJ45 LAN	x1

Physical Specification

Bezel Colour	Black
Product Dimensions	49" 1078.7 x 609.0 x 94.9mm 55" 1214.7 x 685.5 x 94.9mm
Product Weight	49" 26kg 55" 33kg
Packaging Dimensions	49" 1170 x 340 x 700mm 55" 1310 x 340 x 780mm
Packed Weight	49" 29kg (1pcs) 55" 36kg (1pcs)
Bezel Width	2.85mm(T/L) / 1.85mm(B/R)

Environmental Conditions

Operation Temperature	0°C - 60°C
Storage System	-20°C - 60°C

Power

Power Supply	110 - 240 V
Power Consumption (Maximum)	49" 290W 55" 390W

Features

Main	Operation 24/7 non-stop operation, cooling system, small fan control cooling, casing design with internal temperature showing display.
------	--

Installation

The installation of this product should be completed by a qualified installer. Use of components not supplied by Clevertouch or not meeting minimum specifications may impact performance, safety and warranty. For more information, visit clevertouch.com

Support

For all Clevertouch products, visit: support.clevertouch.com

Warranty


Up to 5-Year Warranty. Warranty term and upgrade options vary by region. Contact your local reseller or distributor for information and visit clevertouch.com/about/warranty

Compliance & Certification

Regulatory Certification	
--------------------------	---

Our commitment to the Environment, Quality and Security.

Cyber Essentials and BSI ISO9001, ISO14001, ISO27001 Certifications.



Statement

Size and weight vary by configuration and manufacturing process, please refer to the actual product. The product images are for illustrative purposes only and may slightly differ in appearance, colour, size, etc. from the actual product. The description, illustrations, etc. in this document may subject to change in accordance with the latest product specification and performance. Should the above-mentioned change in the document become necessary, the document may be updated without written notice.