



Pro Series 3 Lite

Simplicity at its finest

Our first non-OS touchscreen, Pro Series 3 Lite has all the power of Clevertouch interactive screens, but with a completely blank slate so you can simply plug in your laptop or computer and use your familiar personal experience on the large format display.

Available in a range of sizes 65" 4K | 75" 4K | 86" 4K



Features



Anti-Glare Display reduces reflections and improves the viewing experience in brightly lit rooms or rooms with windows.



The most fluid, lag-free writing experience on a touchscreen with true 4K High Precision Technology.



Room-filling sound with 2x 20W audio



Connect to the screen via USB, USB-C or HDMI



Add any USB camera for instant video calls, remote collaboration, or hybrid learning



Add: Your own apps, direct from your laptop



Up-to five-years comprehensive warranty



Pro Series 3 Lite Specifications

Display

Diagonal Size	65" 4K 75" 4K 86" 4K
Panel Type	65" VA - Direct LED Backlight 75" VA - Direct LED Backlight 86" IPS - Direct LED Backlight
Response Time	65" 6.5ms 75" 6.5ms 86" 8ms
Display Area	65" 1428.48(H)×803.52(V)mm 75" 1650.24(H)×928.26(V)mm 86" 1895.04(H)×1065.96(V)mm
Aspect Ratio	16:9
Display Colours	1.07 Billion (10 bit)
Resolution	4K UHD (3840x2160 @60Hz)
Refresh Rate	60Hz
Display Color	1.07B(10bit)
NTSC	72%
Contrast Ratio	65" 5000:1 75" 5500:1 86" 1200:1
LCD Viewing Angle	178°
Brightness with glass (min)	300cd/m ²
Brightness with glass (typ)	350cd/m ²
Operation Time	7 days×16 hours
Life Time	50,000 hours minimum

Interactivity

Sensing Type	Infrared recognition
Touch Tool	Passive infrared pen
Touch Accuracy	±1.5mm
Touch Point	40 points touch
Minimum object size	3mm
Writing Height	≤2mm
Interpolation Resolution	32768(W)×32768(D)
Response Time	≤10ms
System	Windows10/Windows8/Windows7/WindowsXP/ Android/Linux/Mac OS X/Chrome

Audio

Sound Channel	2.0
Speaker Power	2×20W
Sound pressure level	82dB SPL

Power

Power Requirements	65" 100-240V~50/60Hz 3.5A 75" 100-240V~ 50/60Hz 4.0A 86" 100-240V~50/60Hz 4.5A
Typical Power*(1)	65" 127W 75" 167W 86" 203W
Max Power*(2) (W/OPS)	65" 360W 75" 396W 86" 437W

Connectivity

HDMI In	3	Up to 4K@60Hz, Onboard, both channels support CEC, with one of them supporting ARC
USB 2.0	1	For system upgrades
USB 3.2	4	Front×2+Rear×2, Can switch channels.
USB Type-C IN	1	Supports USB 2.0, DP-Alt mode, and supports 65W charging (also 65W when OPS is inserted)
TOUCH 2.0	2	Front×1+Rear×1
MIC IN	1	Supports audio mixing function
AUDIO OUT	1	3.5mm Jack
SPDIF	1	PCM output format
RS232	1	Baud rate 9600
RJ45 IN	1	10M/100M/1000Mbps
RJ45 OUT	1	10M/100M/1000Mbps

Physical Spec

Panel Dimensions	65" 1491×898.5×98.8mm 75" 1712×1022×99mm 86" 1957×1159.9×97.8mm
Thickness of machine and wall mount	65" 128.8mm(WIB6540B) 75" 129mm(WIB9060H) 86" 127.8mm(WIB9060H)
Packed Dimensions	65" 1628×185×1014mm 75" 1863×185×1148mm 86" 2110×185×1283mm
Net Weight	65" 31.57kg 75" 41.66kg 86" 50.36kg
Gross Weight	65" 40.17kg 75" 53.71kg 86" 64.20kg
VESA Mount Point	65" 600×400mm/23.62×15.75 inch 75" 800×400mm/31.50×15.75 inch 86" 800×600mm/31.50×23.62 inch
Screws for VESA	M8 x 25mm

Environmental Conditions

Operating Temperature	0° to 40°
Operating Humidity	10% to 90% RH
Storage Temperature	-20° to 60°
Storage Humidity	10% to 90% RH
Altitude	Below 5000 metres

Optional Module

PC Module	OPS72A
------------------	--------

Accessories

Power Cord	X1
Writing Pen	X2
Remote Control	X1


Pro Series 3 Lite Specifications

Warranty

Warranty term and upgrade options vary by region. Contact your local reseller or distributor for information and visit clevertouch.com/about/warranty

Our commitment to the Environment, Quality and Security

Cyber Essentials and BSI ISO9001, ISO14001, ISO27001 Certifications.



Compliance & Certification



Regulatory Certification

CE, FCC, UL, Energy Star & EEC






Pro Series 3 Lite Technical Drawings

86"

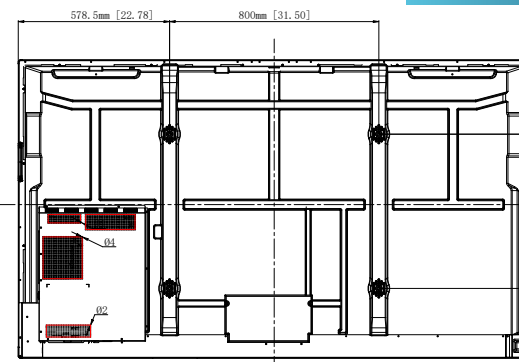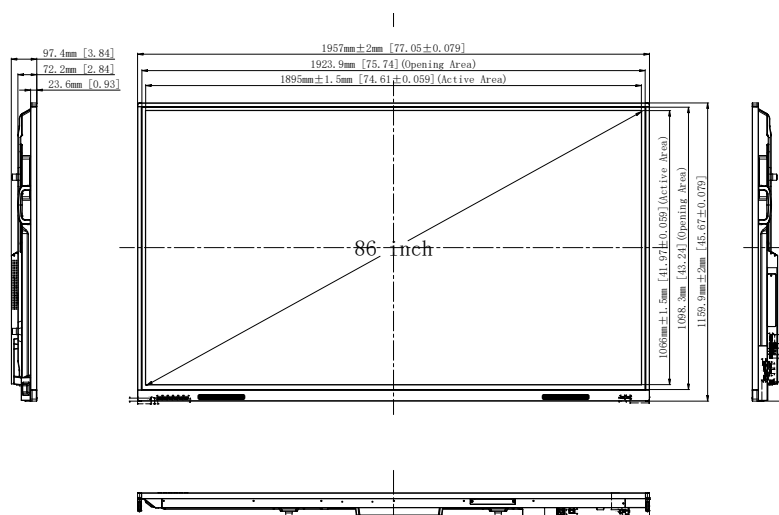

75"

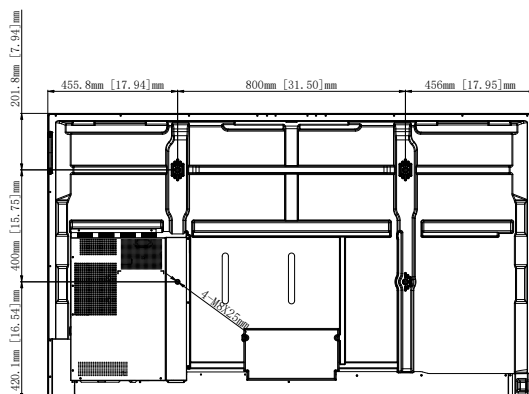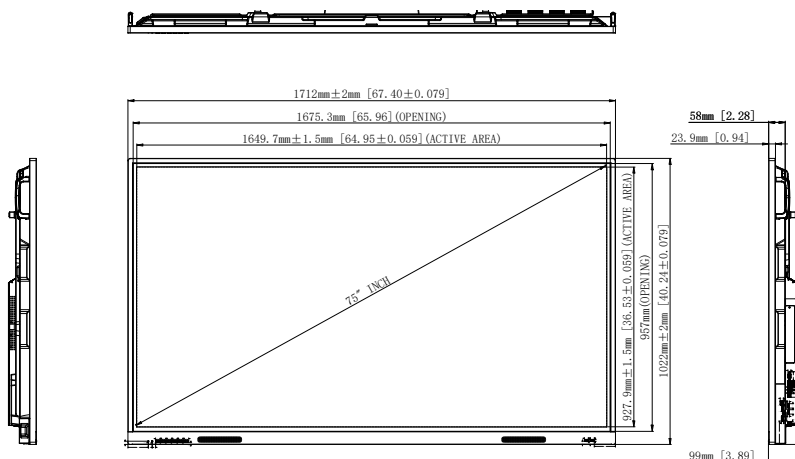

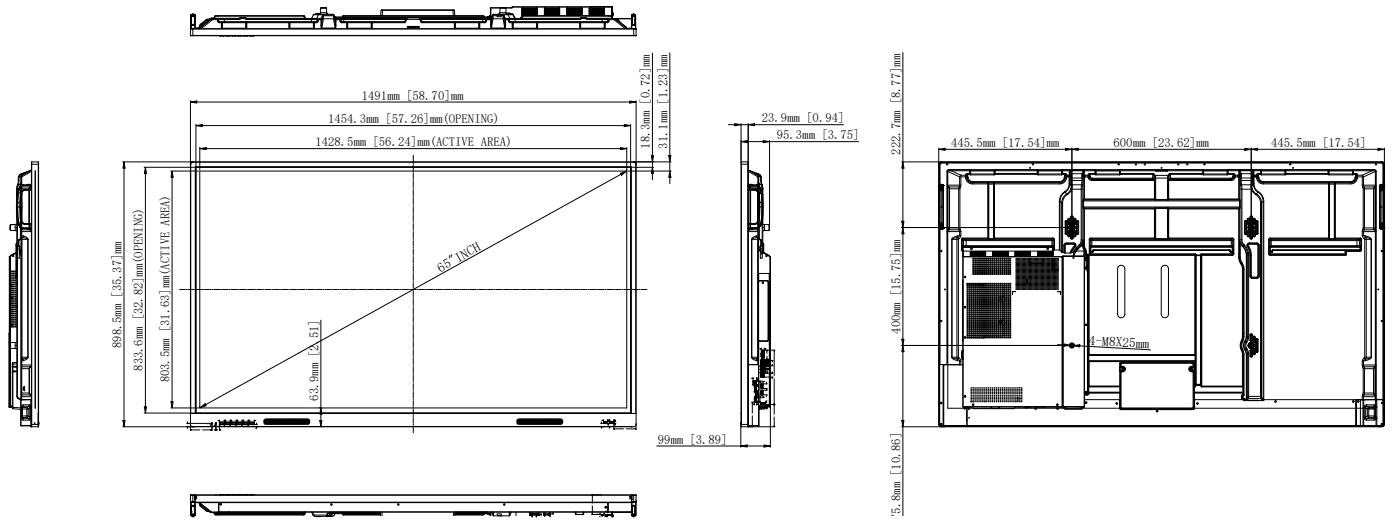

Statement

Size and weight vary by configuration and manufacturing process, please refer to the actual product. The product images are for illustrative purposes only and may slightly differ in appearance, colour, size, etc. from the actual product. The description, illustrations, etc. in this document may be subject to change in accordance with the latest product specification and performance. Should the above-mentioned change in the document become necessary, the document may be updated without written notice.

© 2025 Clevertouch. All rights reserved. Sahara Presentations Systems Ltd is part of the Boxlight group of companies, and the owner of trademarks in several global jurisdictions including but not limited to Clevertouch, the Clevertouch logo, UX Pro, IMPACT™, IMPACT Plus™, Impact MAX, CleverLive, LUX, LYNX Whiteboard, X5, CleverMessage, CleverLiveStore, CleverShare, CleverLiveRooms, CleverMDM, CL Totem, CL Touch Totem, CL Pro, CM Pro and CM Totem. All third-party trademarks (including logos and icons) referenced by Clevertouch remain the property of their respective owners. Unless specifically identified as such, Clevertouch's use of third-party trademarks does not indicate any relationship, sponsorship, or endorsement between Clevertouch and the owners of these trademarks. Applicable Terms and Conditions for warranty and support available at clevertouch.com/about/warranty. All weights and dimensions are approximate. Product specifications are subject to change without notice. Clevertouch.com.